

BENI IN-SURFACE POWER MODULE SPEC SHEET



Beni 2 power
Silver Anodized Aluminum case finish
Black simplex and cord, silver trim



Beni 2 power, 1 dual charging USB-A
Silver Anodized Aluminum case finish
White simplex, trim and cord



Beni 2 power 1 USB-A+C
Silver Anodized Aluminum case finish
Black simplex, trim and cord



Beni 2 power, 1 dual charging USB-A,
1 USB-A+C
Silver Anodized Aluminum case finish
Black simplex and cord, silver trim



Beni 2 power, 1 USB-A+C, 1 HDMI
Silver Anodized Aluminum case finish
White simplex, trim and cord



Beni 2 power 1 dual charging USB-A,
1 open data
Silver Anodized Aluminum case finish
Black simplex, trim and cord



Beni 2 power, 1 USB-A+C, 1 open data
Silver Anodized Aluminum case finish
Black simplex and cord, silver trim






Beni 2 power, 1 dual charging USB-A,
3 open data
Silver Anodized Aluminum case finish
White simplex, trim and cord

Specifications

UL Listed

Number of ports: 2-8 ports available

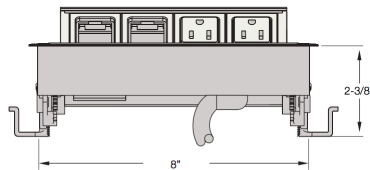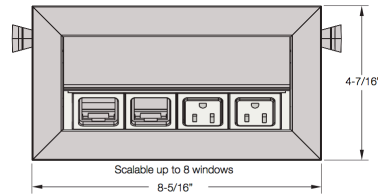

MIN SURFACE DEPTH MAX SURFACE DEPTH
3/8" 1 1/2"
7/8" when using mounting feet

CUT OUT DIMENSIONS

Windows Per Side	Length	Width
2 Windows	5"	4"
3 Windows	6-1/2"	4"
4 Windows	8"	4"
5 Windows	9-1/2"	4"
6 Windows	11"	4"
7 Windows	12-1/2"	4"
8 Windows	14"	4"

Finish Options

SS Silver anodized aluminum case finish, silver trim finish, black simplex finish, black cord

SW Silver anodized aluminum case finish, white trim finish, white simplex finish, white cord

SB Silver anodized aluminum case finish, black trim finish, black simplex finish, black cord

Cord Options

72 inches or 120 inches

Standard Features


- Fluid, one-touch door that remains open during use, durable construction. Fully retractable when not in use.
- 2-8 ports available with an assortment of power options and data configurations.
- Coded (hardwired units are available - contact service@symphonytables.com)
- Constructed out of anodized aluminum with plastic trim and simplex finish offered in multiple finish options.
- Requires cutout in work surface

SYMPHONY®

www.symphonytables.com

Customized By Size

Comes with 2 to 8 windows, as shown below. Each window can be replaced by a variety of power and technology options.

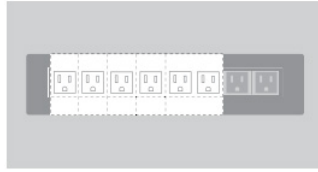

Integrated Technologies

The power simplexes must be grouped together and installed at the right end of this product. Technologies requiring power must immediately follow.



NON-POWERED

Cat6, Cat6A, HDMI, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Passive USB-A, and Passive USB-C

NOTE: Factory install only for DisplayPort and Mini DisplayPort

POWERED

USB-4C, Dual C+A, Dual USB-C 45W, USB-C 60W, USB A+C, Dual USB, Embrava®, Retractable Charging Cord, Bluetooth® Speaker

NOTE: Powered Technologies do not transfer data

POWER SIMPLEX

Tamper
Resistant &
Hospital Grade
Available