



# FELINO IN-SURFACE POWER MODULE SPEC SHEET




Felino 3 power  
Soft Touch Storm finish  
Black cord



Felino 2 power, 1 dual USB-A  
Soft Touch Fog finish  
White cord



Felino 2 power, 1 USB-A+C  
Soft Touch White finish  
White cord




Felino 3 power  
Soft Touch Black finish  
Black cord

## Specifications

UL Listed

Number of ports: 3 ports available

\* Images depicts a 2 Power and 1 USB unit.

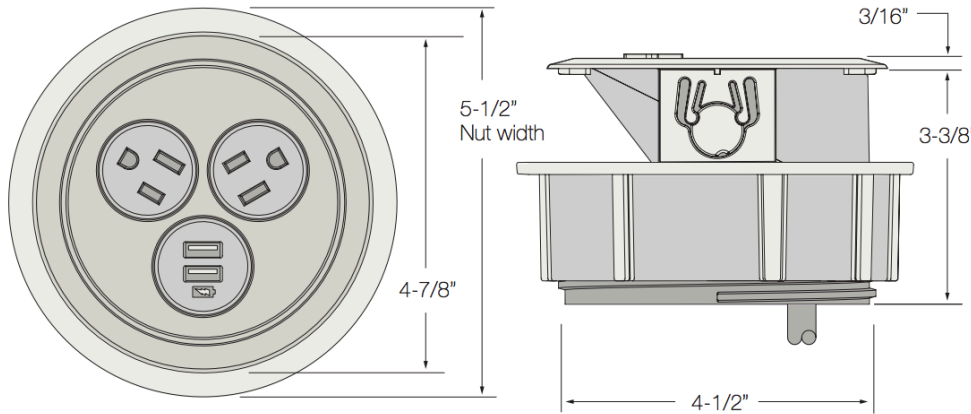

## Surface Cut Out

Drill 4-1/2" Diameter Hole

**Min - Max  
Surface Depth**  
3/4" - 1-1/2".

## Finish Options

- BB** soft touch black plastic finish, black cord
- WW** soft touch white plastic finish, white cord
- FF** soft touch fog plastic finish, white cord
- SS** soft touch storm plastic finish, black cord

## Cord Options

72 inches or 120 inches

## Standard Features


- Soft Touch Finish
- Design allows the product to rotate to open or close to expose or hide the power
- Available in 2 port, 2 AMP per port, USB duplex ideal for charging iPad, iPhone and all other USB compatible devices
- Requires cutout in work surface - hole mount 4-1/2" diameter
- Corded only
- Fits in tops 3/4" to 1-1/2" thick

SYMPHONY®

[www.symphonytables.com](http://www.symphonytables.com)

## Configurations

Two power unit shown with power and technologies available in the blank spaces shown below.

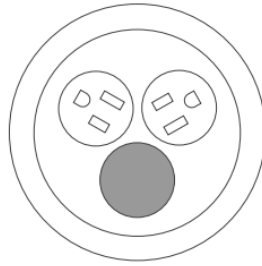

## Integrated Technologies



Dual USB & USB A+C