

KITA II POWER MODULE SPEC SHEET



Kita II 2 power, 1 dual USB-A, 1 open data
Matte Storm powder coated aluminum with
white finish, black cord



Kita II 2 power, 1 USB-A+C, 1 open data
Matte White powder coated aluminum with
white finish, black cord



Kita II 2 power, 1 dual USB-A, 1 HDMI
Matte Black powder coated aluminum with
black finish, black cord



Kita II 2 power, 1 USB-A+C, 1 HDMI
Matte Storm powder coated aluminum with
white/finish, black cord




Kita II 2 power, 1 USB-A+C, 1 dual USB-C 45w.
Matte White powder coated aluminum with white
finish, black cord



Specifications

UL Listed

Number of ports: 4, 5 or 6 ports available

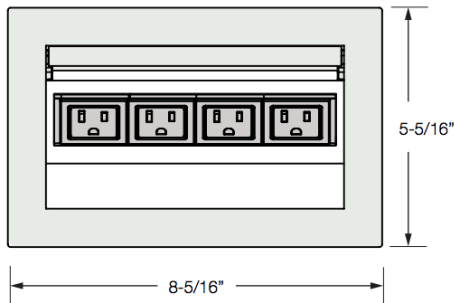

* Image depicts a 4 port unit with 4 power

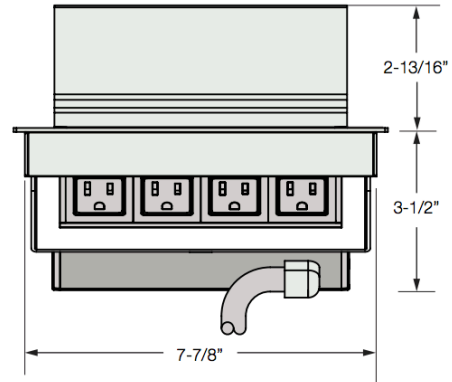

Cut Out Dimension

Unit Size	Length	Width
4 window	7-7/8"	4-7/8"
5 window	9-3/8"	4-7/8"
6 window	10-7/8"	4-7/8"

minimum surface depth 3/8" - maximum surface depth 1-1/2"

Finish Options

MS Matte Storm powder coated aluminum with matte storm simplexes, window frames and end cap, white faceplate, black cord.

MW Matte White powder coated aluminum with matte white simplexes, window frames and end cap, white faceplate, black cord.

MB Matte Black powder coated aluminum with matte black simplexes, window frames and end cap, black faceplate, black cord.

Cord Options

72 inches or 120 inches

Standard Features


- One piece seamless aluminum frame with powder coated aluminum finish
- Concealable power, USB, and data options
- When in use, the lid opens for easy access at the work surface, but closes softly to hide cable clutter out of sight.
- Requires a cut out in the worksurface
- Hardwired versions available

SYMPHONY®

www.symphonytables.com

Configuration Size

4, 5 or 6 windows, as shown. Each window can hold a variety of power or data options.

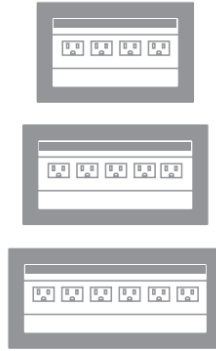

Integrated Technologies

The power simplexes must be grouped together and installed at the right end of this product. Technologies requiring power must immediately follow.



NON-POWERED

Cat6, Cat6A, HDMI, DisplayPort, DVI, Mini DisplayPort, Stereo Jack, Belay, Passive USB-A, and Passive USB-C


NOTE: Factory install only for DisplayPort and Mini DisplayPort



POWERED

USB A+C, Dual USB, USB-4C, Dual A+C, Dual USB-C 45W, USB-C 60W, Retractable Charging Cord, Bluetooth® Speaker

NOTE: Powered technologies do not transfer data



POWER SIMPLEX

Tamper Resistant & Hospital Grade Available